


Small Signal Schottky Diode

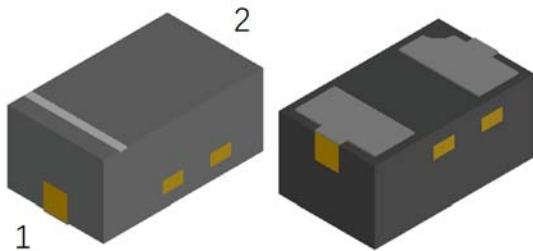

Features

- Moisture sensitivity level 3
- Reverse voltage: 30V
- Average forward current: 200mA

Application

- Ultra-Small Surface Mount Package
- Low Forward Voltage Drop
- Extremely Fast Switching Speed

Mechanical data

- **Package:** DFN1006-2L
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings (T_a=25°C Unless otherwise specified)

Parameter	Symbol	Unit	Value
Device marking code			L91
Repetitive peak reverse voltage	V _{RRM}	V	30
RMS Reverse Voltage	V _{RMS}	V	21
Maximum DC Blocking Voltage	V _{DC}	V	30
Forward current	I _F	mA	200
Repetitive Peak Forward Current	I _{FRM}	mA	300
Non-repetitive surge peak forward current @ t=8.3ms half-sine wave	I _{FSM}	mA	600
Power dissipation	P _D	mW	160
Junction temperature	T _J	°C	-55 to +125
Storage temperature	T _{STG}	°C	-55 to +125



BAT54L2

RoHS
COMPLIANT

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Parameter	Symbol	Unit	Conditions	Min	Typ	Max
Reverse breakdown voltage	V _{BR}	V	I _R =0.1mA	30		
Reverse leakage current	I _R	uA	V _R =25V			2
Forward voltage	V _F	mV	I _F =0.1mA			240
			I _F =1mA			320
			I _F =10mA			400
			I _F =30mA			500
			I _F =100mA			1000
Capacitance	C _J	pF	V _R =1.0V, f=1MHz		10	
Reverse Recovery Time	t _{rr}	ns	I _F =10mA, I _R =1~10mA, R _L =100Ω,		5	

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} (1)	°C/W	625

■ Ordering Information

Preferred P/N	Packing Code	Unit Weight(mg)	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BAT54L2	F1	Approximate 0.9	10k	100k	400k	Tape & Reel



■ Characteristics

Fig. 1 - Forward Characteristics

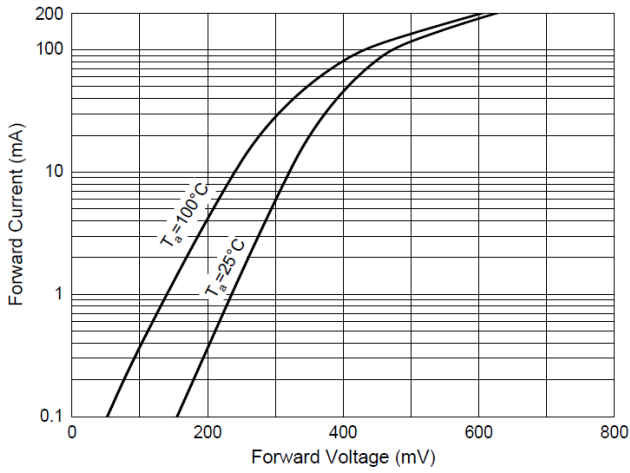


Fig. 2 - Reverse Characteristics

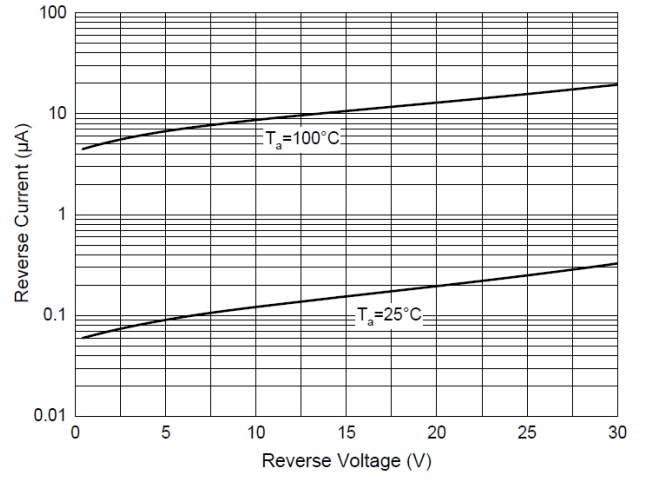


Fig. 3 - Capacitance Characteristics



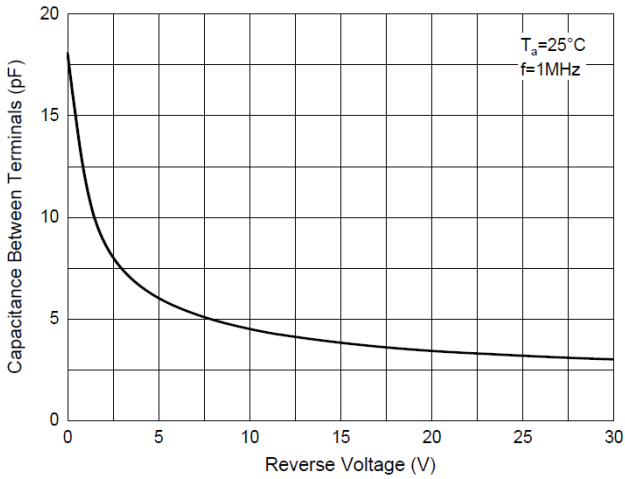


Fig. 4 - Power Derating Curve

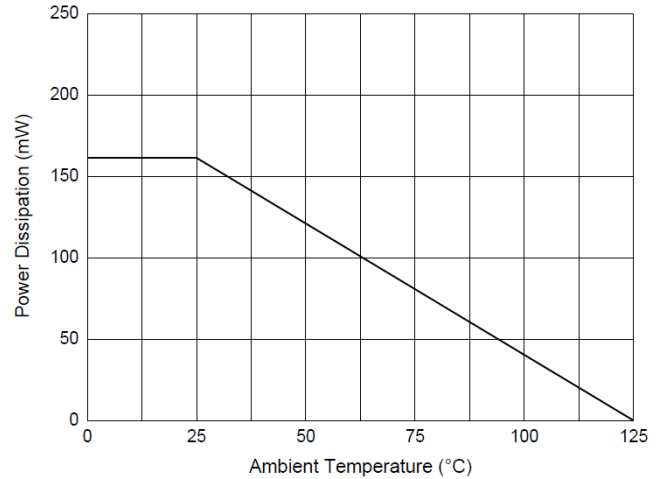


■ Outline Dimensions

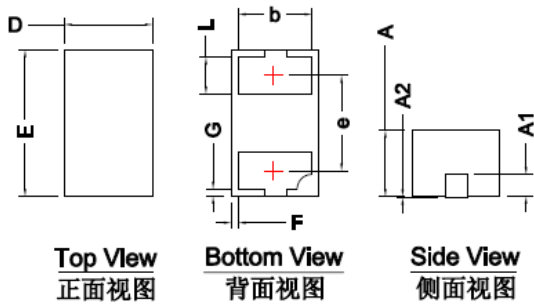

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	0.50	0.60	0.70
E	0.90	1.00	1.10
A	0.35	0.45	0.55
A1	0.15 BSC		
A2			0.10
F	0.005		
G	0.005		
L	0.15	0.25	0.35
b	0.41	0.50	0.59
e	0.65 BSC		

■ Suggested Pad Layout





Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.